



CS6K-285 | 290 | 295P

HIGH EFFICIENCY POLY MODULE

Canadian Solar's modules use the latest innovative poly-
PERC cell technology, increasing module power output
and system reliability, ensured by 16 years of experience
in module manufacturing, well-engineered module
design, stringent BOM quality testing, an automated
manufacturing process and 100% EL testing.

KEY FEATURES



Excellent module efficiency of
up to: 18.02 %



Outstanding low irradiance
performance of up to: 96.5 %



IP68 junction box for long-term
weather endurance



Heavy snow load up to 6000 Pa,
wind load up to 4000 Pa *



linear power output warranty



**product warranty on materials
and workmanship**

MANAGEMENT SYSTEM CERTIFICATES*

ISO 9001:2008 / Quality management system

ISO 14001:2004 / Standards for environmental management system

OHSAS 18001:2007 / International standards for occupational health & safety

PRODUCT CERTIFICATES*

IEC 61215 / IEC 61730: VDE / CE / MCS

UL 1703: CSA

Take-e-way



* If you need specific product certificates, and if module installations are to deviate
from our guidance specified in our installation manual, please contact your local
Canadian Solar sales and technical representatives.


CANADIAN SOLAR INC. is committed to providing high
quality solar products, solar system solutions and services to
customers around the world. As a leading PV project developer
and manufacturer of solar modules with over 24 GW deployed
around the world since 2001, Canadian Solar Inc. is one of the
most bankable solar companies worldwide.

*For detailed information, please refer to the Installation Manual.


CANADIAN SOLAR INC. Canadian Solar MSS (Australia) Pty Ltd., 44 Stephenson St, Cremorne VIC 3121, Australia
support@canadiansolar.com, www.canadiansolar.com/au

ENGINEERING DRAWING (mm)


Rear View

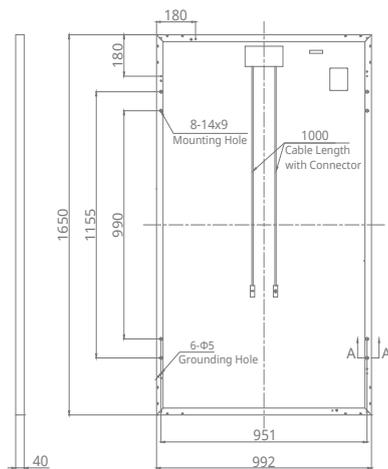

Frame Cross Section A-A

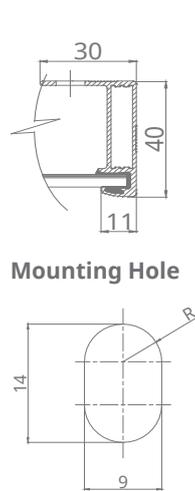

CS6K-295P / I-V CURVES

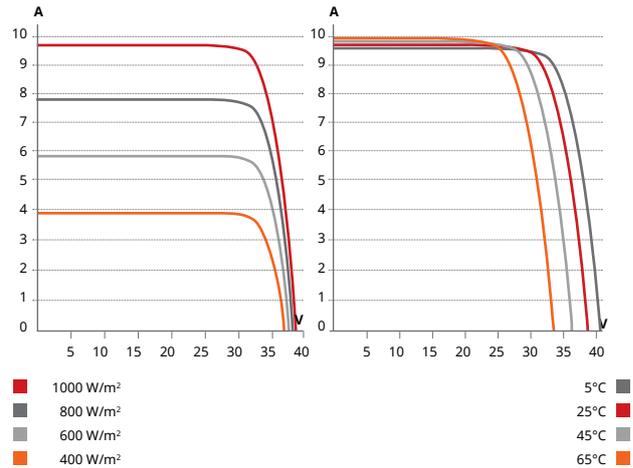

ELECTRICAL DATA | STC*

CS6K	285P	290P	295P
Nominal Max. Power (Pmax)	285 W	290 W	295 W
Opt. Operating Voltage (Vmp)	31.4 V	31.6 V	31.8 V
Opt. Operating Current (Imp)	9.06 A	9.18 A	9.28 A
Open Circuit Voltage (Voc)	38.3 V	38.5 V	38.6 V
Short Circuit Current (Isc)	9.64 A	9.72 A	9.81 A
Module Efficiency	17.41%	17.72%	18.02%
Operating Temperature	-40°C ~ +85°C		
Max. System Voltage	1000 V (IEC) or 1000 V (UL)		
Module Fire Performance	TYPE 1 (UL 1703) or CLASS C (IEC 61730)		
Max. Series Fuse Rating	15 A		
Application Classification	Class A		
Power Tolerance	0 ~ + 5 W		

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C. Measurement uncertainty: ±3% (Pmax).

ELECTRICAL DATA | NMOT*

CS6K	285P	290P	295P
Nominal Max. Power (Pmax)	210 W	214 W	218 W
Opt. Operating Voltage (Vmp)	28.9 V	29.1 V	29.3 V
Opt. Operating Current (Imp)	7.28 A	7.36 A	7.44 A
Open Circuit Voltage (Voc)	35.8 V	36.0 V	36.1 V
Short Circuit Current (Isc)	7.78 A	7.85 A	7.92 A

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

PERFORMANCE AT LOW IRRADIANCE

Outstanding performance at low irradiance, with an average relative efficiency of 96.5 % for irradiances between 200 W/m² and 1000 W/m² (AM 1.5, 25°C).

* The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. Canadian Solar Inc. reserves the right to make necessary adjustment to the information described herein at any time without further notice.

CANADIAN SOLAR INC.

Canadian Solar MSS (Australia) Pty Ltd., 44 Stephenson St, Cremorne VIC 3121, Australia
support@canadiansolar.com, www.canadiansolar.com/au

MECHANICAL DATA

Specification	Data
Cell Type	Poly-crystalline, 6 inch
Cell Arrangement	60 (6×10)
Dimensions	1650×992×40 mm (65.0×39.1×1.57 in)
Weight	18.2 kg (40.1 lbs)
Front Cover	3.2 mm tempered glass
Frame Material	Anodized aluminium alloy
J-Box	IP68, 3 diodes
Cable	4.0 mm ² (IEC), 12 AWG (UL), 1000 mm (39.4 in)
Connector	T4 series or MC4 series
Per Pallet	27 pieces, 538 kg (1186.1 lbs)
Per Container (40' HQ)	756 pieces

TEMPERATURE CHARACTERISTICS

Specification	Data
Temperature Coefficient (Pmax)	-0.39 % / °C
Temperature Coefficient (Voc)	-0.29 % / °C
Temperature Coefficient (Isc)	0.05 % / °C
Nominal Module Operating Temperature (NMOT)	43 ± 2 °C

PARTNER SECTION

